

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number  
**WO 03/088274 A1**

(51) International Patent Classification<sup>7</sup>: **H01B 7/02**

(21) International Application Number: PCT/EP02/04210

(22) International Filing Date: 16 April 2002 (16.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **PIRELLI S.P.A** [IT/IT]; Viale Sarca, 222, I-20126 Milano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BELLI, Sergio** [IT/IT]; Via Maestri del Lavoro, 8, I-57126 Livorno (IT). **BAREGGI, Alberto** [IT/IT]; Via Aselli, 35, I-20133 Milano (IT). **SCELZA, Cristiana** [IT/IT]; Via San Salvatore, 6, I-84044 Angellara di Vallo della Lucania (IT).

(74) Agents: **GIANNESI, Pier, Giovanni et al.**; Pirelli S.p.A., Viale Sarca, 222, I-20126 Milano (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: ELECTRIC CABLE AND MANUFACTURING PROCESS THEREOF

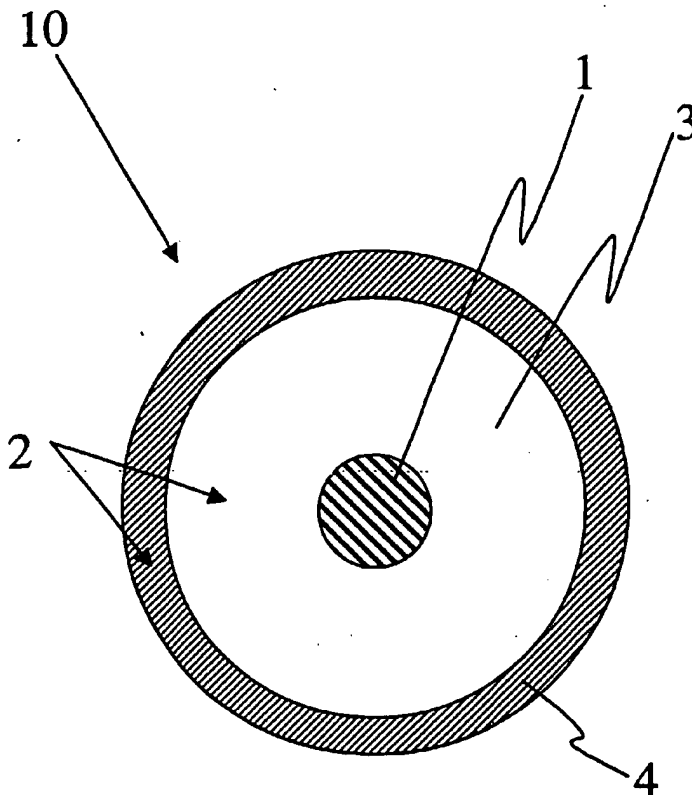

(57) Abstract: Electric cable, in particular for power transmission at low voltage, comprising at least one conductor and an insulating coating surrounding said at least one conductor, said insulating coating comprising at least two insulating layers. In a radial direction from the inside towards the outside of said electrical cable, said insulating coating comprises at least one insulating layer made of a non-expanded polymeric material and at least one insulating layer made of an expanded polymeric material.

WO 03/088274 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**"ELECTRIC CABLE AND MANUFACTURING PROCESS THEREOF"**

The present invention relates to an electric cable with increased flexibility and peeling-off properties.

5        Moreover, the present invention relates to an electric cable with increased intelligibility of the marked indicia thereon.

In particular, the present invention relates to an electric cable for power transmission at low voltage, 10 preferably said electric cable being suitable for building wiring.

Furthermore, the present invention relates to a manufacturing process of said electric cable.

In the present description, the expression "low 15 voltage" means a voltage of less than about 1 kV, the expression "medium voltage" means a voltage of between about 1 kV and about 30 kV, the expression "high voltage" means a voltage of between about 30 kV and about 220 kV, while the expression "extra high voltage" means a voltage 20 of greater than about 220 kV.

Cables for power transmission at low voltage are generally provided with a metallic conductor which is surrounded by an insulating coating adhering to said metallic conductor.

25        In the present description the expression "cable core" indicates a structure comprising at least one conductor and a respective electric insulating coating arranged in a position radially external to said conductor.

30        For the purposes of the present description, the expression "unipolar cable" means a cable provided with a single core as defined above, while the expression "multipolar cable" means a cable provided with at least one pair of said cores. In greater detail, when the 35 multipolar cable has a number of cores equal to two, said

CONFIRMATION COPY

cable is technically defined as being a "bipolar cable", if there are three cores, said cable is known as a "tripolar cable", and so on.

In a position radially external to said insulating  
5 coating, cables for power transmission at low voltage can be provided with an outer polymeric sheath having the function of mechanically protecting the cables from the external environment, e.g. from any impact and/or abrasion that might lead to cable cracks or ruptures  
10 formation. In a multipolar type configuration, in the case said outer protective polymeric sheath is present, the multipolar cable is provided with a common sheath surrounding the cable cores as defined above.

Document US-4,789,589 discloses an electric cable  
15 provided with a double layer insulating coating arranged upon a conductive element, said double layer comprising an inner layer of a polyolefin compound and of a cellular construction, and an outer layer of a given maximum thickness and of a non-cured and non-curable polyolefin  
20 base compound having a solid (i.e. non-expanded) construction, said base compound including a material compatible with the polyolefin of the inner layer. Preferably, the polyolefin of the outer layer is polyvinyl chloride. Document US-4,789,589 refers to the  
25 problem of separation of the thin uncured outer layer from the inner layer during the manufacturing process and/or during installation of the cable. The Applicant observed that such a solution can not correctly work since the inner insulating layer, due to its expanded  
30 state, presents discontinuities (i.e., voids within the polymeric material, said voids being filled with air or gas) in the space surrounding the conductor, i.e. in the space where the electrical field is the most relevant.

Data communication cables provided with a double  
35 layer insulating coating comprising an inner layer of an

expanded polyolefin compound and an outer layer of a non-expanded polyolefin base compound are described in documents CA-952,991 and US-5,841,072.

Document JP 90-35544 discloses an electric low voltage distribution cable comprising a pair of twisted insulated conductors between which a foaming material is arranged. A sheathing material is also provided for covering the twisted cable cores. The foaming and the insulating material can be polyvinyl chloride.

Document US-3,013,109 relates to non-metallic sheathed cables for building wiring comprising a protective sheath made of expanded cellular organic material. According to said document, the insulation is made of a dense solid material (e.g. a dense semi-rigid polyvinyl chloride) while the outer protective sheath is composed essentially of a tough, flexible resinous plastic material such as polyvinyl chloride in expanded cellular form. Furthermore, document US-3,013,109 states that the outer protective sheath is distinct from the insulation and is slippable or slidable thereon with the result that the cable can be readily bent without distortion in the plane of the conductors and, after being deliberately bent at a selected angle, the cable maintains the bent shape indefinitely.

Document JP 11-203941 discloses a method for manufacturing a cable provided with an insulating coating obtained from a resin composition mainly comprising vinyl chloride resin, and with an expanded sheath layer obtained from a composition mainly comprising vinyl chloride resin into which a foaming agent has been compounded.

Document WO 98/52197, in the name of the Applicant, discloses the use of a layer made of expanded polymeric material of a suitable thickness to be applied in a position radially external to the aforesaid cable core.

According to said document, the expanded layer confers the cable high resistance to accidental impacts which might be suffered by the latter during the steps of cable transport or laying. Said impacts are very dangerous for the cable since they can cause considerable damage to the cable structure (for example deformation of the insulating layer, detachment of the cable layers) determining, for example, changes in the electrical gradient of the insulating layer with a consequent reduction in its insulating capacity. Said expanded layer is preferably located in a position immediately below the outer polymeric sheath of the cable and, being able of endowing the cable with high impact strength, it makes possible to eliminate any traditional, generally metallic, protective armours. In order to confer the cable the desired impact resistance, the expanded layer is obtained from a polymeric material which, before expansion, has a flexural modulus at room temperature (measured according to ASTM Standard D790) of at least 200 MPa.

Document US-3,936,591 discloses a non metallic-sheathed cable for building wiring comprising a wall of expanded polyvinyl chloride insulation surrounding each cable conductor and a thin-walled tubular jacket of polyvinyl chloride surrounding the totality of insulated conductors, said jacket conferring mechanical protection to the non metallic-sheathed cable.

Generally, a cable for building wiring is installed within the walls of a building and the installation process requires that the cable passes through walls restrictions or, more frequently, that the cable is pulled through conduits, wherein the cable is permanently confined.

In order to be correctly installed with simple and quick operations, a cable for building wiring needs to be

particularly flexible so that it can be inserted into the wall passages and/or wall conduits and follow the bends of the installation path without being damaged.

During customer installation, due to the tortuosity of the installation path and to friction during the pulling operation, the cables for building wiring are generally subjected to tearing or scraping against rough edges and/or surfaces.

The Applicant has perceived that an increased flexibility of an electric cable for building wiring can allow to reduce the damages caused by said tearing or scraping actions.

Furthermore, a very important aspect which is required to be satisfied by a cable for building wiring is a simple and quick peeling-off of the cable. In the present description the term "peeling-off of a cable" is used to indicate the removal of all the cable layers which are radially external to the conductor so that it results uncoated and can be electrically connected to a conductor of a further cable or to an electrical apparatus.

The peeling-off property of a cable for building wiring is a widely felt request of the market since the peeling-off of a cable is an operation which is manually performed by the technical staff. For this reason, said operation is required to be easy and quick to be performed by the operator, taking also into account that it is frequently carried out in narrow spaces and rather uncomfortable conditions.

The Applicant has found that it is possible to improve the flexibility and the peeling-off property of a cable for building wiring by providing the latter with an insulating coating which has an expanded portion. Preferably, said expanded portion of the insulating coating is a circumferentially extended layer.

In particular, the Applicant has found that said expanded insulating layer has to be preferably positioned not adhering to the cable conductor, i.e. not directly contacting the cable conductor. In other words, the Applicant has found to provide the cable with an insulating coating comprising at least two insulating layers so that, in a radial direction from the inside towards the outside of the cable, the insulating coating comprises at least one insulating layer made of a non-expanded polymeric material and at least one insulating layer made of an expanded polymeric material.

The Applicant has found that the presence of said expanded insulating layer in a position radially external to the non-expanded insulating layer is particularly advantageous in respect of the peeling-off property of the cable and the flexibility thereof.

The Applicant has found that the expanded insulating layer exerts on the conductor a ringing force in the radial direction which is lower than the ringing force exerted on the conductor by a non-expanded insulating layer. For this reason, the force to be exerted by the operator to peel off the cable insulating coating is remarkably reduced and the peeling-off property of the cable is favourably increased.

Moreover, by providing the cable with an expanded insulating layer the flexibility of the cable is advantageously increased with favourable results in the installation process thereof.

In a first aspect the present invention relates to an electric cable comprising a conductor and an insulating coating surrounding said conductor, said insulating coating having a predetermined thickness and comprising at least two insulating layers, characterized in that, in a radial direction from the inside towards the outside of said electrical cable, said insulating



layers comprise at least one insulating layer made of a non-expanded polymeric material and at least one insulating layer made of an expanded polymeric material, said at least one insulating layer made of a non-expanded polymeric material being integral with said at least one insulating layer made of an expanded polymeric material.

According to the present invention, the predetermined thickness of said insulating coating is such that said insulating coating confers to the cable the electrical insulating features required by the use it is provided for (e.g. defined by relevant Standards). In other words, in the case the cable is provided with a sheath radially external to said insulating coating, said sheath does not contribute to obtain said required electrical insulating features, the required values of the latter being guaranteed by the insulating coating of predetermined thickness.

According to the present invention, the thickness of said insulating layer made of a non-expanded polymeric material is at least half of said predetermined thickness of said insulating coating. Preferably, the thickness of said insulating layer made of a non-expanded polymeric material is not lower than 70% of the predetermined thickness of said insulating coating, more preferably the thickness of said insulating layer made of a non-expanded polymeric material is not lower than 85% of the predetermined thickness of said insulating coating.

According to the present invention, the expanded insulating layer is integral with the non-expanded insulating layer so that said layers are bonded together to form the cable insulating coating. In the present description, the term "integral" is used to indicate that a unitary structure was obtained. Therefore, in the present description the expression "the expanded insulating layer is integral with the non-expanded

insulating layer" means that "the expanded insulating layer is formed as a unit with the non-expanded insulating layer". In other words, this means that the expanded and non-expanded insulating layers are bonded together and, once produced, they can not be separated without a cutting means or the like, for instance they can not be separated by applying a traction force thereto or by heating.

Processes for obtaining a unitary structure as defined hereinabove, said unitary structure consisting of a first layer and a second layer, can be, for instance: a) a co-extrusion process of said first and second layers; b) the "tandem" technique according to which the extruder of said first layer and the extruder of said second layer are arranged in series. Alternative embodiments of said abovementioned processes can include the step of application of a suitable adhesive layer between said first and second layers, for instance by means of said co-extrusion process or said "tandem" technique. Particularly preferred is the co-extrusion technique so that the expanded insulating layer of the cable insulating coating is co-extruded with the non-expanded insulating layer of said cable insulating coating.

Preferably, the cable according to the present invention is not provided with a sheath layer, unless a mechanical protective layer against accidental impacts or special abrasion resistance during the installation process thereof is required. In the present description, the term "cable sheath layer" is intended to identify a protective outer layer of the cable having the function of protecting the latter from accidental impacts or abrasion. From the foregoing, according to the term mentioned above, the cable sheath layer is not required

to provide the cable with specific electrical insulating properties.

Moreover, the Applicant has found that the cable according to the present invention, thanks to the presence of the expanded insulating layer, can be easily and effectively marked. Generally a cable, such as a cable for building wiring, needs to be marked in order to properly identify the cable. Indicia which are generally provided to the external surface of a cable are, for example, the trade name, the name of the manufacturer, the Standard the cable is in accordance with, the production year. Generally, said indicia are provided every 0.5 m - 1.0 m of cable length and it is important that the marked letters can be intelligible and simply recognizable by the operator. The Applicant has found that the expanded insulating layer increases the intelligibility of the marked letters. In fact, the presence of said expanded insulating layer allows the marked letters to stand out from the cable surface more clearly with respect to the case in which the expanded layer is not present.

Furthermore, the expanded insulating layer of the cable according to the present invention advantageously decreases the total weight of the cable so that its installation and transportation is easier and its costs can be remarkably reduced.

In a further aspect of the present invention, the cable insulating coating according to the present invention comprises three insulating layers. In a radial direction from the inside towards the outside of the electric cable, said insulating coating comprises: a) an inner insulating layer made of a non-expanded polymeric material; b) an intermediate non continuous insulating layer made of an expanded polymeric material; c) a

continuous external insulating layer made of an expanded polymeric material.

In a further aspect of the present invention, the cable insulating coating according to the present invention comprises, in a radial direction from the inside towards the outside of the electric cable: a) an inner insulating layer made of a non-expanded polymeric material; b) an intermediate insulating layer made of an expanded polymeric material; c) an external insulating layer made of a non-expanded polymeric material. Preferably, said inner insulating layer and said external insulating layer are made of the same polymeric material.

The Applicant has found that, even though the expanded insulating layer is an intermediate layer and is not an external insulating layer, the markability of the cable and the peeling-off property thereof are favourably increased by the presence of said expanded layer.

In a further aspect the present invention relates to a process for manufacturing an electric cable comprising a conductor and an insulating coating surrounding said conductor, said insulating coating comprising, in a radial direction from the inside towards the outside of said electrical cable, at least one insulating layer made of a non-expanded polymeric material and at least one insulating layer made of an expanded polymeric material, said process comprising the steps of: a) feeding said at least one conductor to an extruding machine; b) depositing by co-extrusion: a non-expandable polymeric material in a position radially external to said at least one conductor so as to form said at least one insulating layer made of a non-expanded polymeric material; and an expandable polymeric material in a position radially external to said at least one insulating layer made of a non-expanded polymeric material so as to form said at least one insulating layer made of an expanded polymeric

material; c) expanding said expandable polymeric material during said step of depositing by co-extrusion.

Further characteristics and advantages will become clearer in the light of the following description of some preferred embodiments of the present invention.

The following description makes reference to the accompanying drawings, in which:

- Figure 1 shows a cross right section of an example of a cable according to the present invention;
- Figure 2 shows a cross right section of an example of a further embodiment of a cable according to the present invention, and
- Figure 3 shows a cross right section of an example of a further embodiment of the cable of Figure 2.

In the following of the present description, the term "expanded polymeric material" means a polymeric material with a predetermined percentage of "free" space inside the material, i.e. a space not occupied by the polymeric material, but by gas or air.

In general, said percentage of free space in an expanded polymer is expressed by the so-called "expansion degree" (G), defined as follows:

$$G = (d_0/d_e - 1) * 100$$

where  $d_0$  denotes the density of the unexpanded polymer and  $d_e$  denotes the apparent density measured on the expanded polymer.

The expanded polymeric material of the expanded insulating layer comprises at least one expandable polymer. If necessary said polymer, after expansion, can be crosslinked, as described in the following of the present description.

Said expandable polymer can be selected from the group comprising: polyolefins, copolymers of various

olefins, olefins/unsaturated esters copolymers, polyesters, and mixtures thereof. Examples of suitable polymers are: polyethylene (PE), in particular low-density PE (LDPE), medium-density PE (MDPE), high-density PE (HDPE) and linear low-density PE (LLDPE); polypropylene (PP); ethylene-propylene elastomeric copolymers (EPM) or ethylene-propylene-diene terpolymers (EPDM); natural rubber; butyl rubber; ethylene/vinyl ester copolymers, for example ethylene/vinyl acetate (EVA); ethylene/acrylate copolymers; ethylene/ $\alpha$ -olefin thermoplastic copolymers; polystyrene; acrylonitrile-butadiene-styrene resins (ABS); halogenated polymers, in particular polyvinyl chloride (PVC); polyurethane (PUR); polyamides; aromatic polyesters; and their copolymers or mechanical blends.

Polyvinyl chloride is particularly preferred.

In the attached figures, similar or identical components have been given the same reference signs.

Figure 1 shows the cross section of a first embodiment of a cable 10 for power transmission at low voltage according to the present invention.

Cable 10 is of the unipolar type and comprises a conductor 1 and an insulating coating 2 comprising two insulating layers 3, 4. In details, according to the embodiment shown in Figure 1, the insulating coating 2 comprises a first inner insulating layer 3 surrounding the conductor 1 and adhering thereto, and a second insulating layer 4 which is coaxial with and external to said inner insulating layer 3. The inner insulating layer 3 is non-expanded while the external insulating layer 4 is made of an expanded polymeric composition having electrical insulating properties, said polymeric composition comprising at least one expandable polymer chosen from the group mentioned above.

The expansion degree of the external expanded insulating layer 4 is generally between 2% and 500%, preferably between 5% and 200%, more preferably between 10% and 50%. As explained in the following of the present description, the expansion of the polymeric base of said external insulating layer 4 is carried out during the extrusion step and can be effected either chemically or physically. An expansion degree between 2% and 100% can be obtained by means of an expansion of the chemical type. On the contrary, an expansion of the physical type can produce a very high expansion degree (i.e., equal to 500%); but it is more expensive than the chemical type. For the purposes of the present invention it is considered to be expanded a layer whose polymeric base has an expansion degree not lower than 2%.

Furthermore, according to the embodiment of Figure 1, the inner insulating layer 3 is made of a non-expanded polymeric composition having electrical insulating properties, said polymeric composition comprising at least one polymer chosen, for example, from: polyolefins (homopolymers or copolymers of various olefins), ethylenically unsaturated olefin/ester copolymers, polyvinyl chloride (PVC), polyesters, polyethers, polyether/polyester copolymers, and blends thereof. Examples of such polymers are: polyethylene (PE), in particular linear low-density PE (LLDPE); polypropylene (PP); propylene/ethylene thermoplastic copolymers; ethylene/propylene rubbers (EPR) or ethylene/propylene/diene rubbers (EPDM); natural rubbers; butyl rubbers; ethylene/vinyl acetate (EVA) copolymers; ethylene/methyl acrylate (EMA) copolymers; ethylene/ethyl acrylate (EEA) copolymers; ethylene/butyl acrylate (EBA) copolymers; ethylene/ $\alpha$ -olefin copolymers, and the like.

Polyvinyl chloride is particularly preferred.

Preferably, the insulating layers 3, 4 of the insulating coating 2 are made of the same base polymer.

Preferably, said base polymer is polyvinyl chloride (PVC).

5 Except for the expanding agent, preferably the polymeric compositions of the non-expanded insulating layer and of the expanded insulating layer have the same recipe ingredients.

For a conductor of a given cross section, Italian  
10 Standard CEI-UNEL 35752 (2nd Edition - February 1990) sets a predetermined average thickness of the insulating coating to be provided to the cable so that, at a predetermined temperature, a minimum electrical resistance of said insulating coating needs to be  
15 guaranteed. For example, for a single conductor having a cross section of about 1 mm<sup>2</sup>, said Italian Standard requires an average thickness of the insulating coating of about 0.7 mm in order to obtain, at 70 °C, a minimum electrical resistance of said insulating coating of about  
20 0.095 MOhm\*km. For example, for a single conductor having a cross section of about 10 mm<sup>2</sup>, said Italian Standard requires an average thickness of the insulating coating of about 1.0 mm in order to obtain, at 70 °C, a minimum electrical resistance of said insulating coating of about  
25 1.91 MOhm\*km.

Therefore, according to the present invention, the minimum average thickness of the insulating coating of an electrical cable is predetermined so that the required electric insulating properties are compatible with the  
30 Standards (e.g. Italian Standard CEI-UNEL 35752 or any other Standard equivalent thereto) and are satisfied by said insulating coating.

For instance, the predetermined thickness of the insulating coating is such that, at 70°C, the minimum



value of the electric resistance of said insulating coating is greater than 0.024 MOhm\*km.

For instance, the minimum average thickness of the insulating coating of the electrical cable is not greater  
5 than 2.5 mm.

Furthermore, according to the present invention, the insulating constant  $k_i$  of the electrical insulating layers 3, 4 is such that the required electric insulating properties are compatible with the Standards (e.g.  
10 Italian Standard CEI 20-11 or other equivalent Standards). For instance, the electrical insulating layers 3, 4 have an insulating constant  $k_i$  greater than 750 MOhm\*km at 20°C. For instance, said insulating constant  $k_i$  is greater than 0.3 MOhm\*km at 70°C.

15 According to the present invention, in order to confer to the external insulating layer a suitable mechanical resistance without decreasing the flexibility of the cable, the expanded polymeric material of the external insulating layer is obtained from a polymeric  
20 material that, before expansion, has a flexural modulus at room temperature, measured according to ASTM standard D790-86, comprised between 20 MPa and 600 MPa. Preferably, said flexural modulus at room temperature is not greater than 200 MPa, more preferably it is comprised  
25 between 20 MPa and 200 MPa, even more preferably it is comprised between 10 MPa and 150 MPa.

Preferably, the external insulating layer 4 has a thickness comprised between 0.05 mm and 1.00 mm, more preferably between 0.10 mm and 0.50 mm.

30 Figure 2 shows the cross section of a further embodiment of a cable 20 for power transmission at low voltage according to the present invention.

Cable 20 is of the unipolar type and comprises a conductor 1 surrounded by a multilayer insulating coating  
35 21. In details, according to said embodiment the

insulating coating 21 comprises: an inner insulating layer 3 surrounding the conductor 1 and adhering thereto; an external insulating layer 4 coaxial with said inner insulating layer 3; and an intermediate insulating layer 5 which is interposed between said inner insulating layer 3 and said external insulating layer 4.

According to the embodiment shown in Figure 2, the intermediate insulating layer 5 is circumferentially non-continuous in the cross section. Preferably, said intermediate insulating layer 5 presents at least one interruption. Even more preferably, said interruption is located along the external profile of the inner insulating layer 3. Alternatively, said interruption is located in proximity of the external profile of the inner insulating layer 3.

Preferably, said circumferentially non-continuous intermediate insulating layer 5 comprises at least one sector, i.e. a portion, which is substantially semicircular in shape (e.g. a portion which is lenticular in shape).

According to the embodiment shown in Figure 2, the semicircular sectors are in the number of four and are obtained within the inner insulating layer 3.

Preferably, the ratio between: a) the sum of the lengths of the arcs 5a defined by said sectors on the circumference of the external insulating layer 4, and b) the circumference of the external insulating layer 4 itself, is greater than or equal to 0.5, more preferably greater than or equal to 0.7. Preferably, said ratio is lower than or equal to 1, more preferably lower than or equal to 0.9.

According to a further embodiment (not shown), the semicircular sectors are obtained within the external insulating layer 4.

The particular configuration shown in Figure 2 can be advantageously employed to rapidly and easily perform the change of colour of the cable to be produced. Generally, a cable for building wiring is suitably coloured in order to simply distinguish one cable from another during installation and/or use. The manufacturing of a cable having the configuration shown in Figure 2 is carried out by providing the extrusion apparatus with a flow control device which is able to modify the flow passage of the polymeric composition so that the polymeric material, which is used to form the external insulating layer, is successively used to form the intermediate insulating layer, and viceversa. In other words, said control device allows the flows of the polymeric materials of the external insulating layer and of the intermediate insulating layer to be exchanged so that the change of the cable colour can be performed easily and in a short length of the cable so that the scraps are remarkably reduced.

According to the embodiment of Figure 2, the inner insulating layer 3 is non-expanded while the intermediate insulating layer 5 and the external insulating layer 4 are expanded.

Figure 3 shows the cross section of a further embodiment of a cable 30 for power transmission at low voltage according to the present invention.

Cable 30 differs from cable 20 of Figure 2 in that the external insulating layer 4 of the insulating coating 31 is non-expanded. In details, the insulating coating 31 comprises non-expanded inner and external insulating layers 3, 4 and an expanded intermediate insulating layer 5.

According to a further embodiment (not shown), the intermediate insulating layer is a layer which is circumferentially continuous, in the cross section.

Preferably, said circumferentially continuous intermediate insulating layer uniformly surrounds the whole external profile of the inner insulating layer.

The figures illustrated above show only some of the possible embodiments of cables in which the present invention can be advantageously employed. Therefore, any suitable modifications can be made to the embodiments mentioned above such as, for example, the use of cables of the multipolar type or conductors of sectorial cross section.

With regard to the manufacturing process of a cable according to the present invention, the main steps characterizing the aforesaid process in the case when the unipolar cable of Figure 1 has to be produced are presented in the following. However, the teaching given hereinbelow for the manufacturing of a unipolar cable can be used also in the case a multipolar cable has to be produced.

The conductor 1, unwound from a suitable reel, is introduced into an extrusion apparatus which is suitable for providing the conductor 1 with the insulating coating 2.

According to the embodiment of Figure 1, the insulating coating 2 comprises an inner insulating layer 3 which is non-expanded and an external insulating layer 4 which is expanded.

The expansion of the polymeric base of said external insulating layer 4 is carried out during the extrusion step of the latter and can be effected either chemically or physically. In the first case, the expansion is effected by adding to the polymeric composition a suitable expanding agent which is able of evolving a gas under predetermined pressure and temperature conditions, i.e the pressure and temperature conditions of the extruder head. In the second case, the expansion is

effected by injecting a gas at high pressure directly into the barrel of the extruder.

Preferably, according to the present invention, the insulating layers 3, 4 of the insulating coating 2 are applied by co-extrusion so that the expanded insulating layer 4 becomes integral with the non-expanded insulating layer 3, said layers becoming bonded together to form the cable insulating coating 2.

In the case the expansion is chemically effected, examples of suitable expanding agents are: azodicarbamide, paratoluene sulphonylhydrazide, mixtures of organic acids (e.g. citric acid) with carbonates and/or bicarbonates (e.g. sodium bicarbonate), and the like.

In the case the expansion is physically effected, examples of gases that can be injected at high pressure into the extruder barrel are: nitrogen, carbon dioxide, air, low-boiling hydrocarbons, e.g. propane or butane, halogenated hydrocarbons, e.g. methylene chloride, trichlorofluoromethane, 1-chloro-1,1-difluoroethane, and the like, or their mixtures.

Preferably, the die of the extruder head has a diameter slightly lower than the final diameter of the cable with expanded covering that it has to be obtained, in such a way that expansion of the polymer outside the extruder results in attainment of the desired diameter.

It has been observed that, in the same extrusion conditions (such as rotary speed of the screw, speed of the extrusion line, diameter of the extruder head) one of the process variables having most influence on the expansion degree is the extrusion temperature. In general, a sufficient expansion degree can be obtained at temperatures greater than 130°C. The extrusion temperature is preferably at least 140°C, more preferably

about 180°C. Normally, an increase in extrusion temperature corresponds to a higher expansion degree.

Furthermore, it is possible to control the expansion degree of the polymer to some extent by acting upon the cooling rate. In fact, by delaying or by suitably speeding up the cooling of the polymer forming the expanded covering as it leaves the extruder, it is possible to increase or decrease the expansion degree of said polymer. This can be made, for example, by varying the flow rate of a cooling fluid (e.g. water) in a cooler positioned downstream of the extruder head.

Furthermore, the expanded polymeric material of the cable insulating layer of the insulating coating can undergo a cross-linking process. Cross-linking is effected, after the steps of extrusion and expansion, according to known techniques, in particular by heating in the presence of a radical initiator, for example an organic peroxide such as dicumyl peroxide. Alternatively, cross-linking can be effected using silanes, i.e. by using a polymer belonging to the group mentioned above, in particular a polyolefin, to which are grafted, covalently, silane units comprising at least one hydrolysable group, for example trialkoxysilane groups, in particular trimethoxysilane. Grafting of the silane units to the polyolefin backbone can be made by a radical reaction with silane compounds, for example methyltriethoxysilane, dimethyldiethoxysilane, vinyltrimethoxysilane, and the like. Cross-linking is effected in the presence of water and of a cross-linking catalyst, for example an organic titanate or a metallic carboxylate. Dibutyltin dilaurate (DBTL) is especially preferred.

For further description of the invention, some illustrative examples are given below.

\*\*\*\*\*

## EXAMPLE 1

A first polymeric mix was prepared suitable for making the inner insulating layer of a cable insulating coating.

5 The composition of said mix is shown in Table 1 (expressed in parts by weight per 100 parts by weight of base polymer, or phr).

Except for the plasticizing agent, the components of said first polymeric mix were firstly mixed in a closed  
10 mixer working at a constant temperature of about 120°C and achieving a suitable vacuum degree (i.e., a maximum residual pressure of about 100 mmHg). Successively, e.g. 10 sec after the introduction of the mix components, the plasticizing agent was introduced into said mixer. The  
15 polymeric mix, discharged at a temperature of about 120°C, was cooled at a temperature of about 70°C and fed into an extruder. Thus, the extrudate was successively submitted to a pelletizing operation.

TABLE 1

PVC K70 Resin (e.g. Evipol SH7020® produced by EVC)	100
Antimony trioxide	0.75
Calcium carbonate	60
Bisphenol A	0.62
Stabilizing agent	4
Plasticizing agent	38
Mineral charge	2.5

20

Some samples in the form of plates were obtained from the pellets mentioned above in order to carry out mechanical measures.

The flexural modulus of the polymeric material,  
25 before expansion, was measured at room temperature (20°C).

according to ASTM standard D790 and a value of 144 MPa was obtained.

Ultimate tensile stress was measured according to Standard IEC 60811 1-1 (2<sup>nd</sup> Edition, 1985) and a value of 16.8 MPa was obtained. According to said Standard, the ultimate tensile stress of an insulating compound is required to be not lower than 12.5 MPa, while the ultimate tensile stress of a sheathing compound is required to be not lower than 10 MPa.

Ultimate elongation was measured according to Standard IEC 60811 1-1 and a value of 250% was obtained.

\*\*\*\*\*

#### EXAMPLE 2

A second polymeric mix was prepared suitable for making the external insulating layer of a cable insulating coating.

The composition of said mix is shown in Table 2 (expressed in parts by weight per 100 parts by weight of base polymer, or phr).

The components of said second polymeric mix were subjected to process steps analogous to those described in Example 1.

TABLE 2

PVC K70 Resin (e.g. Evipol SH7020® produced by EVC)	100
Antimony trioxide	3
Calcium carbonate	100
Bisphenol A	0.2
Stabilizing agent	8
Plasticizing agent	40
Chlorinated paraffin	18



Some samples in the form of plates were obtained from said pellets in order to carry out mechanical properties measures.

The flexural modulus of the polymeric material, before expansion, was measured at room temperature (20°C) according to ASTM standard D790 and a value of 32.7 MPa was obtained.

Ultimate tensile stress was measured according to Standard IEC 60811 1-1 and a value of 14 MPa was obtained.

Ultimate elongation was measured according to Standard IEC 60811 1-1 and a value of 320% was obtained.

\*\*\*\*\*

#### EXAMPLE 3

In order to obtain during the extrusion process the expansion of the external insulating layer, a master-batch of the second polymeric composition and of the expanding agent was prepared. The master-batch is reported in Table 3 hereinbelow (expressed in parts by weight - %wt).

TABLE 3

Second polymeric composition	60% wt
LAGOCELL20 <sup>®</sup> (expanding agent)	20% wt
LAGOCELLBO20 <sup>®</sup> (expanding agent)	20% wt

LAGOCELL20<sup>®</sup> is azodicarbonamide, produced by Lagor S.p.A..

LAGOCELLBO20<sup>®</sup> is 4,4'-oxybis(benzenesulfonhydrazide), produced by Lagor S.p.A..

\*\*\*\*\*

#### EXAMPLE 4

Production of a low-voltage cable was undertaken according to the cable design shown in Figure 1.

The cable conductor 1 was made of copper and had a cross section of about 1.5 mm<sup>2</sup>.

The cable conductor was provided with an insulating coating 2 consisting of an inner insulating layer 3 and an external insulating layer 4. The inner insulating layer 3 and the external insulating layer were obtained by co-extrusion providing the extrusion apparatus with a double layer extrusion head. The inner insulating layer was obtained by introducing the first polymeric composition reported in Table 1 into a 120 mm single-screw extruder in 25 D configuration, with rotary speed of the screw of about 20.3 rev/min. The external insulating layer was obtained by introducing the second polymeric composition reported in Table 2 together with 1.2% by weight of the master-batch reported in Table 3 and 1% by weight of colouring agent (Polyone 3050 BK30® - produced by Polyone) into a 120 mm single-screw extruder in 25 D configuration, with rotary speed of the screw of about 45 rev/min.

The thickness of the inner insulating layer was about 0.6 mm. The thickness of the expanded external insulating layer was about 0.1 mm. Therefore, the overall thickness of the insulating coating was about 0.7 mm in accordance with Italian Standard CEI-UNEL 35752 (2nd Edition - February 1990).

The speed line was about 570 m/min and the cable diameter was comprised between 2.88 mm and 2.91 mm.

Tables 4 and 5 hereinbelow show the thermal profiles of the extruders of said insulating layers and of the extrusion head of the extrusion apparatus, the latter being divided into a plurality of zones identifying distinct portion of the extruder along its longitudinal axis.

Table 4

Zone of the extruder of the inner insulating layer	Temperature (°C)
Zone 1	125
Zone 2	145
Zone 3	145
Zone 4	145
Zone 5	145
Neck	140
Die	150

Table 5

Zone of the extruder of the external insulating layer	Temperature (°C)
Zone 1	130
Zone 2	150
Zone 3	160
Zone 4	155
Neck	150
Die	150

5 The material of the insulating coating had a final density of 1.43 kg/l and a expansion degree of 5%. The expansion degree of the external insulating layer alone was of about 30%.

The cable was successively cooled in water and finally wound on a storage reel.

#### 10 Mechanical properties

A sample of the cable produced according to the procedure described in Example 4 was tested in order to measure the most relevant mechanical properties of the cable.

15 The ultimate tensile stress, measured according to Standard IEC 60811 1-1 mentioned above, was of about 15 MPa, while the ultimate elongation, measured according to the Standard mentioned above, was of about of 205%.

From a manual handling of the cable sample, the Applicant has detected that the flexibility thereof was sensibly improved.

Electrical properties

- 5       The insulating constant  $k_i$  was measured according to Italian Standard CEI 20-11 mentioned above and values of about 750 MOhm\*km at 20°C and of about 0.7 MOhm\*km at 70°C were obtained.

Peeling-off property

- 10       A sample of the cable was tested by measuring the load (KN) necessary for extracting the insulating coating from the conductor.

          The test was carried out as follows. A cable sample of about 180 mm in length was provided so that a first  
15   end portion of the cable of about 50 mm in length and a second end portion of the cable of about 80 mm in length were prepared devoid of the insulating coating. Therefore, the cable consisted of an insulated central portion of about 50 mm in length and of first and second  
20   end portions made of the conductor only. A cylinder, provided with a longitudinal hole of a diameter corresponding to the external diameter of the insulated cable, was employed in order to contain the cable sample. In details, the cable sample was inserted into the  
25   longitudinal hole of the cylinder so that the whole first end portion of the cable came out from the cylinder while the central portion and the second end portion of the cable were positioned inside the cylinder. Since the external diameter of the insulated portion of the cable  
30   was substantially equal to the diameter of the hole of the cylinder, the latter was maintained in this position thanks to the friction action between the walls of the hole and the insulated portion of the cable. A dynamometer was used to carry out the test, said  
35   dynamometer being provided with upper and lower clamps.

In details, the dynamometer fixing upper clamps were associated to the cable conductor of the first end portion while the dynamometer movable fixing lower clamps were associated to the lower end of the cylinder so that  
5 the latter could be moved downwardly (i.e. in the direction of the longitudinal hole). The test was stopped when the cylinder was displaced downwardly of a length equal to the length of the cable insulated portion (i.e., about 50 mm) and the force necessary to obtain said  
10 displacement (i.e., the force necessary to remove the insulating coating from the conductor) was measured. The measured value was of about 0.025 KN.

#### Marking property

A sample of the cable was marked by embossing when  
15 the cable came out from the extrusion head, i.e. when the cable was not cooled yet.

In order to evaluate the quality of the marking, the sample was inspected by means of a reflection microscope and a height of about 40  $\mu\text{m}$  of the marked letters was  
20 measured.

\*\*\*\*\*

#### EXAMPLE 5 (comparative)

Production of a low-voltage cable similar to that of Example 4 was undertaken, the only difference being that  
25 the external insulating layer of the cable was non-expanded. Therefore, the external insulating layer was obtained by introducing into the corresponding extruder only the polymeric composition reported in Table 2 (no master-batch was needed since no expanding agent was  
30 required).

The working conditions of the cable manufacturing process were identical to those described in Example 4.

#### Mechanical properties

A sample of the cable was tested in order to measure  
35 the most relevant mechanical properties of the cable.

The ultimate tensile stress, measured according to Standard IEC 60811 1-1 mentioned above, was of about 16 MPa, while the ultimate elongation, measured according to the Standard mentioned above, was of about of 205%.

5        Electrical properties

The insulating constant  $k_i$  was measured according to Italian Standard CEI 20-11 mentioned above and values of about 800 MOhm\*km at 20°C and of about 0.7 MOhm\*km at 70°C were obtained.

10       Peeling-off property

A sample of the cable was tested analogously to the procedure described in Example 4.

The measured value was of about 0.045 KN.

Marking property

15       A sample of the cable was marked by embossing according to the procedure described in Example 4.

The height of the marked letters was of about 20  $\mu\text{m}$ .

## CLAIMS

1. Electric cable (10; 20; 30) comprising a conductor  
(1) and an insulating coating (2; 21; 31)  
5 surrounding said conductor (1), said insulating  
coating (2; 21; 31) having a predetermined thickness  
and comprising at least two insulating layers (3; 4;  
5), characterized in that, in a radial direction  
from the inside towards the outside of said  
10 electrical cable (10; 20; 30), said insulating  
layers (3; 4; 5) comprise:
  - a. at least one insulating layer (3) made of a  
non-expanded polymeric material, and
  - b. at least one insulating layer (4; 5) made of  
15 an expanded polymeric material,  
said at least one insulating layer (4; 5) made of an  
expanded polymeric material being integral with said  
at least one insulating layer (3) made of a non-  
expanded polymeric material.
- 20 2. Electric cable (10; 20; 30) according to Claim 1,  
wherein the thickness of said at least one  
insulating layer (3) made of a non-expanded  
polymeric material is at least half of said  
predetermined thickness of said insulating coating  
25 (2; 21; 31).
3. Electric cable (10; 20; 30) according to Claim 2,  
wherein the thickness of said at least one  
insulating layer (3) made of a non-expanded  
polymeric material is not lower than 70% of said  
30 predetermined thickness of said insulating coating  
(2; 21; 31).
4. Electric cable (10; 20; 30) according to Claim 3,  
wherein the thickness of said at least one  
insulating layer (3) made of a non-expanded  
35 polymeric material is not lower than 85% of said

predetermined thickness of said insulating coating (2; 21; 31).

5. Electric cable (10; 20; 30) according to Claim 1, wherein said at least one insulating layer (4; 5) made of an expanded polymeric material is bonded with said at least one insulating layer (3) made of a non-expanded polymeric material.
6. Electric cable (10; 20; 30) according to Claim 1, wherein said at least one insulating layer (4; 5) made of an expanded polymeric material is co-extruded with said at least one insulating layer (3) made of a non-expanded polymeric material.
7. Electric cable (10; 20; 30) according to Claim 1, wherein said at least one insulating layer (3) made of a non-expanded polymeric material adheres to said at least one conductor (1).
8. Electric cable (20) according to Claim 1, wherein said at least one insulating layer (5) made of an expanded polymeric material of said insulating coating (21) is an intermediate layer between an inner insulating layer (3) made of a non-expanded polymeric material and an external insulating layer (4) made of an expanded polymeric material.
9. Electric cable (30) according to Claim 1, wherein said at least one insulating layer (5) made of an expanded polymeric material of said insulating coating (31) is an intermediate layer between an inner insulating layer (3) made of a non-expanded polymeric material and an external insulating layer (4) made of a non-expanded polymeric material.
10. Electric cable (20; 30) according to Claim 8 or 9, wherein said intermediate insulating layer (5) is circumferentially non-continuous in the cross section.



11. Electric cable (20; 30) according to Claim 10, wherein said intermediate insulating layer (5) presents at least one interruption.
- 5 12. Electric cable (20; 30) according to Claim 11, wherein said at least one interruption is located along the external profile of said inner insulating layer (3).
13. Electric cable (20; 30) according to Claim 10, wherein said at least one interruption is located in  
10 proximity of the external profile of said inner insulating layer (3).
14. Electric cable (20; 30) according to Claim 10, wherein said circumferentially non-continuous intermediate insulating layer (5) comprises at least  
15 one semicircular sector.
15. Electric cable (20; 30) according to Claim 14, wherein said at least one semicircular sector is provided within said inner insulating layer (3).
16. Electric cable (20; 30) according to Claim 14,  
20 wherein said at least one semicircular sector is provided within said external insulating layer (4).
17. Electric cable (20; 30) according to Claim 8 or 9, wherein said intermediate insulating layer (5) is circumferentially continuous in the cross section.
- 25 18. Electric cable (10; 20; 30) according to Claim 1, wherein said expanded polymeric material is obtained from a polymeric material that, before expansion, has a flexural modulus at room temperature, measured according to ASTM Standard D790, comprised between  
30 20 MPa and 600 MPa.
19. Electric cable (10; 20; 30) according to Claim 18, wherein said flexural modulus is not greater than 200 MPa.

20. Electric cable (10; 20; 30) according to Claim 19, wherein said flexural modulus is comprised between 20 MPa and 200 MPa.
21. Electric cable (10; 20; 30) according to Claim 20, wherein said flexural modulus is comprised between 10 MPa and 150 MPa.
22. Electric cable (10; 20; 30) according to Claim 1, wherein the polymeric material of said at least one insulating layer (4; 5) is an expandable polymer selected from the group comprising: polyolefins, copolymers of various olefins, olefins/unsaturated esters copolymers, polyesters, and their mixtures.
23. Electric cable (10; 20; 30) according to Claim 22, wherein said expandable polymer is polyvinyl chloride.
24. Electric cable (10; 20; 30) according to Claim 1, wherein said at least one insulating layer (3) made of a non-expanded polymeric material and said at least one insulating layer (4; 5) made of an expanded polymeric material are made of the same base polymeric material.
25. Electric cable (10; 20; 30) according to Claim 1, wherein said at least one insulating layer (4; 5) made of an expanded polymeric material has an expansion degree comprised between 2% and 500%.
26. Electric cable (10; 20; 30) according to Claim 25, wherein said expansion degree is comprised between 5% and 200%.
27. Electric cable (10; 20; 30) according to Claim 26, wherein said expansion degree is comprised between 10% and 50%.
28. Electric cable (10; 20; 30) according to Claim 1, wherein said at least two insulating layers (3; 4; 5) of said insulating coating (2; 21; 31) present an

insulating constant ( $k_1$ ) greater than 750 MOhm\*km at 20°C.

29. Electric cable (10; 20; 30) according to Claim 1, wherein said at least two insulating layers (3; 4; 5) of said insulating coating (2; 21; 31) present an insulating constant ( $k_1$ ) greater than 0.3 MOhm\*km at 70°C.
30. Electric cable (10; 20) according to Claim 1, wherein said at least one insulating layer (4) made of an expanded polymeric material has a thickness comprised between 0.05 mm and 1.00 mm.
31. Electric cable (10; 20) according to Claim 30, wherein the thickness of said at least one insulating layer (4) made of an expanded polymeric material is comprised between 0.10 mm and 0.50 mm.
32. Process for manufacturing an electric cable (10; 20; 30), said cable (10; 20; 30) comprising a conductor (1) and an insulating coating (2; 21; 31) surrounding said conductor (1) and comprising, in a radial direction from the inside towards the outside of said electrical cable (10; 20; 30), at least one insulating layer (3) made of a non-expanded polymeric material and at least one insulating layer (4; 5) made of an expanded polymeric material, said process comprising the steps of:
- feeding said conductor (1) to an extruding machine;
  - depositing by co-extrusion:
    - a non-expandable polymeric material in a position radially external to said conductor (1) so as to form said at least one insulating layer (3) made of a non-expanded polymeric material;

- an expandable polymeric material in a position radially external to said at least one insulating layer (3) made of a non-expanded polymeric material so as to form said at least one insulating layer (4; 5) made of an expanded polymeric material;
  - expanding said expandable polymeric material during said step of depositing by co-extrusion.
33. Process according to Claim 32, wherein said step of expanding is effected during said step of depositing by co-extrusion by adding an expanding agent.
34. Process according to Claim 33, wherein said step of expanding is effected during said step of depositing by co-extrusion by injecting a gas at high pressure.

1/3

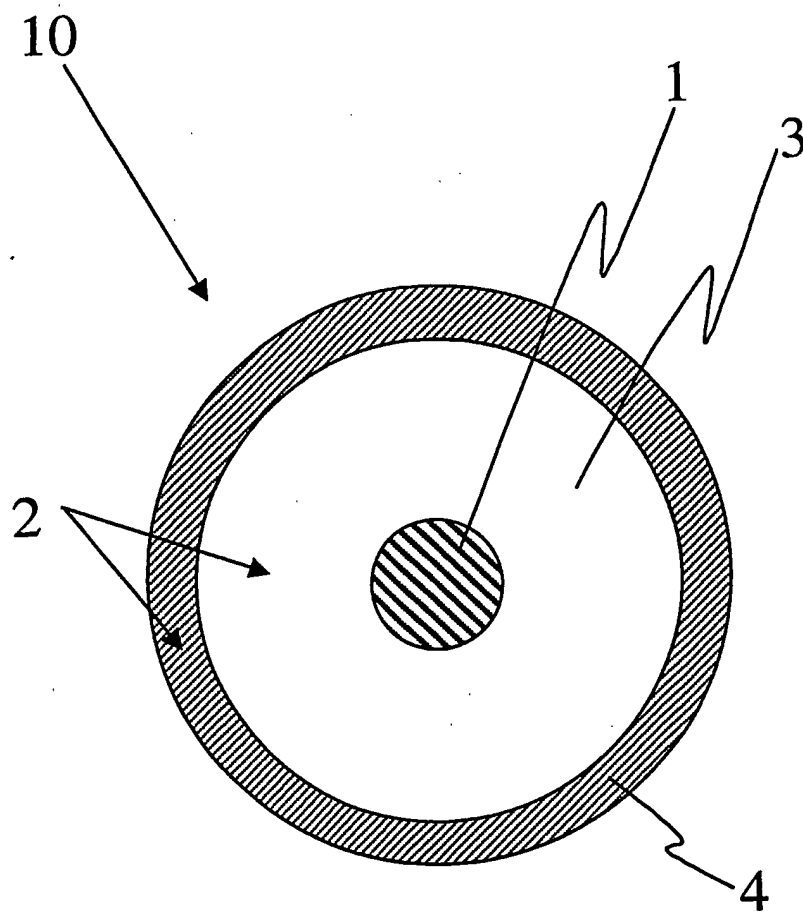


Fig. 1

2/3

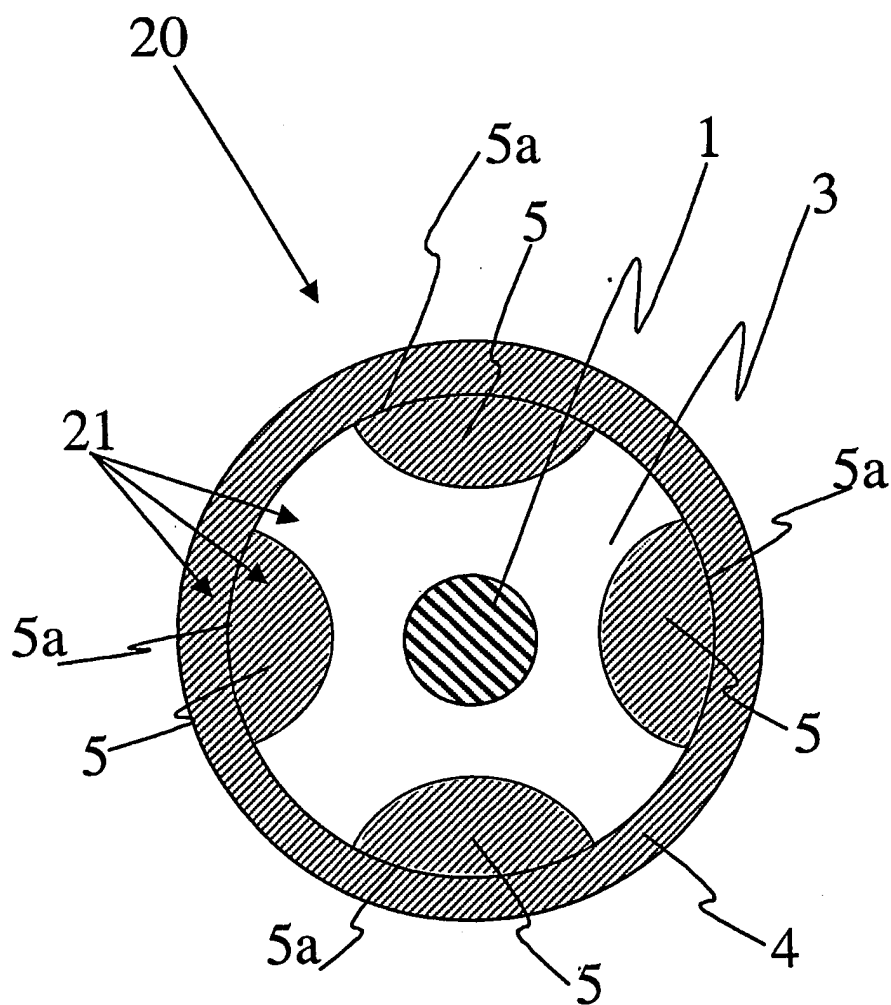


Fig. 2

3/3

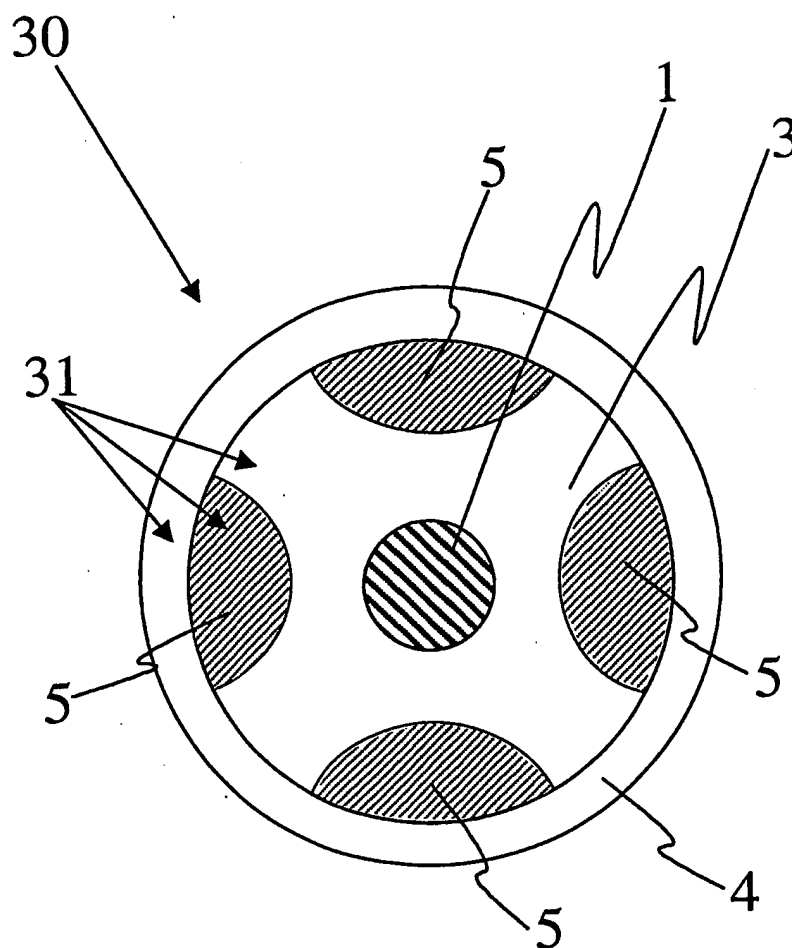


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/04210

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01B7/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 52197 A (CAIMI LUIGI ;BALCONI LUCA (IT); BAREGGI ALBERTO (IT); BELLI SERGIO) 19 November 1998 (1998-11-19) cited in the application	1
A	claims 1-28; figures 1-5	2-34
X	EP 0 271 990 A (JUNKOSHA CO LTD) 22 June 1988 (1988-06-22)	1
A	column 2, line 32 - line 43; figure 1	2-34
X	US 4 604 497 A (BELL JOHN M ET AL) 5 August 1986 (1986-08-05)	1
A	claims 1-4; figures 1-4	2-34
X	GB 2 096 819 A (NORTHERN TELECOM LTD) 20 October 1982 (1982-10-20)	1
A	claims 1-6; figures 1,2	2-34
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

26 November 2002

Date of mailing of the international search report

04/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Demolder, J



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/04210

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 013 109 A (FAULKNER JOSEPH W ET AL) 12 December 1961 (1961-12-12) cited in the application column 3, line 35 -column 6, line 14; figure 1 -----	1
A		2-34

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/04210

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9852197	A	19-11-1998	AT 220240 T	15-07-2002
			AU 743873 B2	07-02-2002
			AU 8015898 A	08-12-1998
			BG 103792 A	31-07-2000
			BR 9809119 A	01-08-2000
			CN 1255229 T	31-05-2000
			DE 69806377 D1	08-08-2002
			DK 981821 T3	21-10-2002
			EA 1727 B1	27-08-2001
			EE 9900489 A	15-06-2000
			EG 21959 A	30-04-2002
			WO 9852197 A1	19-11-1998
			EP 0981821 A1	01-03-2000
			JP 2002510424 T	02-04-2002
			NO 995535 A	12-11-1999
			NZ 337909 A	26-10-2001
			PL 336696 A1	03-07-2000
			SI 981821 T1	31-10-2002
			SK 152099 A3	14-08-2000
			TR 9902729 T2	21-03-2000
			TW 405126 B	11-09-2000
			ZA 9804027 A	19-01-1999
			HU 0002747 A2	28-12-2000
EP 0271990	A	22-06-1988	JP 1897949 C	23-01-1995
			JP 6018087 B	09-03-1994
			JP 63131409 A	03-06-1988
			EP 0271990 A2	22-06-1988
			GB 2197744 A	25-05-1988
US 4604497	A	05-08-1986	NONE	
GB 2096819	A	20-10-1982	CA 1155940 A1	25-10-1983
US 3013109	A	12-12-1961	NONE	